


Heater Kit for Metaglas sight glass

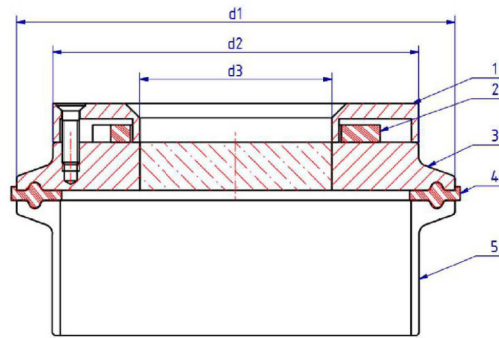

Application

- In most cases, these are for applications in the pharmaceutical and food industries. Only for closed tanks and are NOT suitable for ATEX zone

- 1 - Cover cap, 1.4404
- 2 - Silicone – heat element, insulation material air side
- 3 - Metaglas Type 80
- 4 - Clamp gasket, DIN32676
- 5 - Clamp nozzle, DIN32676

Technical data

- Temperature: up to -60°C
- Max. temperature: 200°C
- The temperature control system will need to be provided by the customer.
- Thermocouples: Type J (FeCuNi)

Advantages

- Resistant to aging and weathering
- Food safe
- Very good chemical compatibility
- Environmentally friendly
- Etched design (optionally)
- Connection to PLC or external controller possible

Protection class

- Dustproof and protected from low pressure water jets IP65
- Marks of conformity: VDA, CE, SEV, UL

Size	d1	d2	d3	Voltage
ARM.3,0.STR	91	76	40	24V
ARM.3,5.STR	106	90	50	24V
ARM.4,0.STR	119	102	55	24V
ARM.6,0.STR	167	152	73	24V
ARM.8,0.STR	218	198	100	24V
ARM.10.STR	268	245	120	24V
ARM.12.STR	319	300	140	24V