
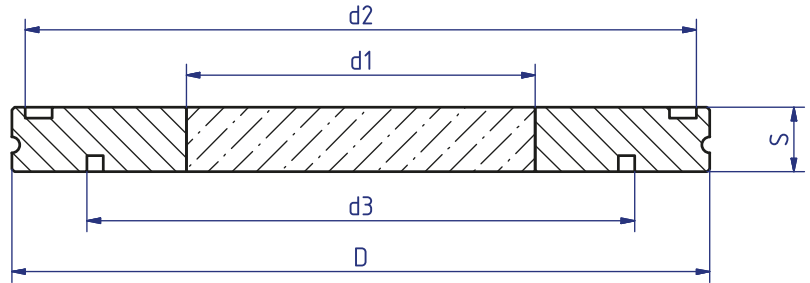


METAGLAS® ISO-K sight glass

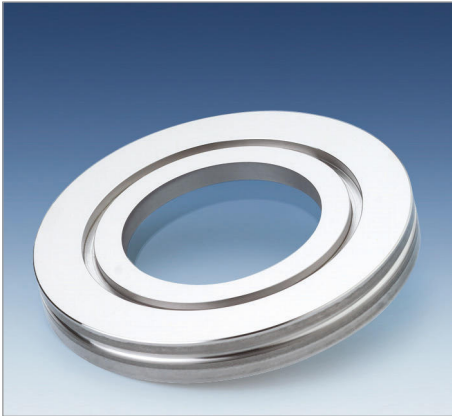

**Applications**

- ISO-K – connections
- Ultra high vacuum

**Advantages**

- Extremely compact design
- Easy, instruction-free installation
- Security against total failure
- Long service life
- Suitable for high vacuum and pressure

**Operating conditions**

- Temperature: See table

**Approvals and technical data**

- Pressure Equipment Directive 2014/68/EU, Module H (DIN/EN/ISO 9001)
- AD2000 Standards W0/TRD 100
- Sight glass fused to metal conforming to DIN 7079
- Materials to VdTÜV specifications and the DIN/EN designated standards
- Glass: borosilicate to DIN 7080 / DIN 7079

**Material certificates**

- Certificate of Conformity EN 10204 – 3.1 or 3.2 at a surcharge

Ring materials	Temperature (TS)
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4610	-60°C to +300°C

NW	D	d1	d2	d3	S
63	95	50	92	70	12
80	110	60	105	83	12
100	130	65	125	102	12
125	155	75	150	127	12
160	180	90	175	153	12
200	240	120	235	213	12
250	290	140	285	261	12